




Avoid imbalanced loads

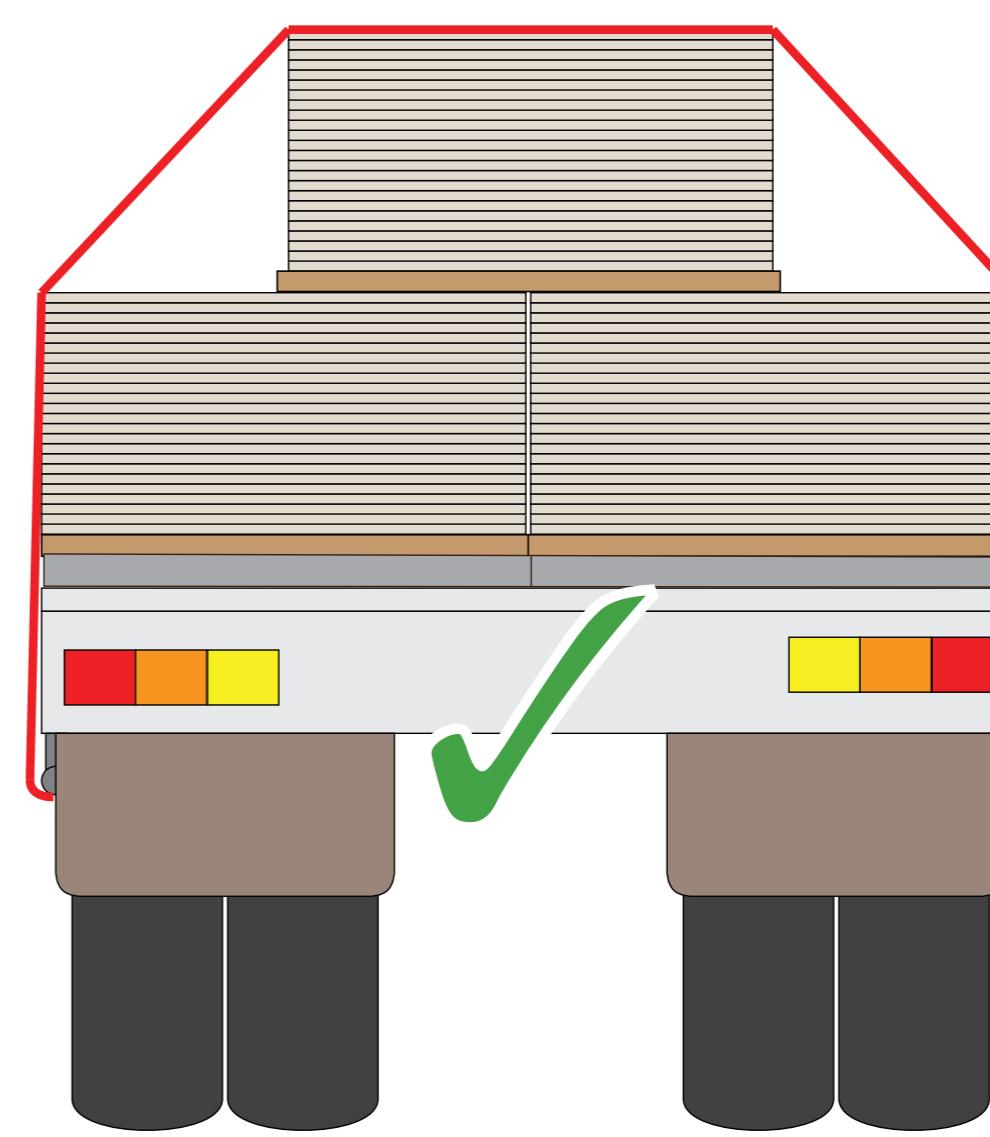


Pyramid stack loads of 3 bundles

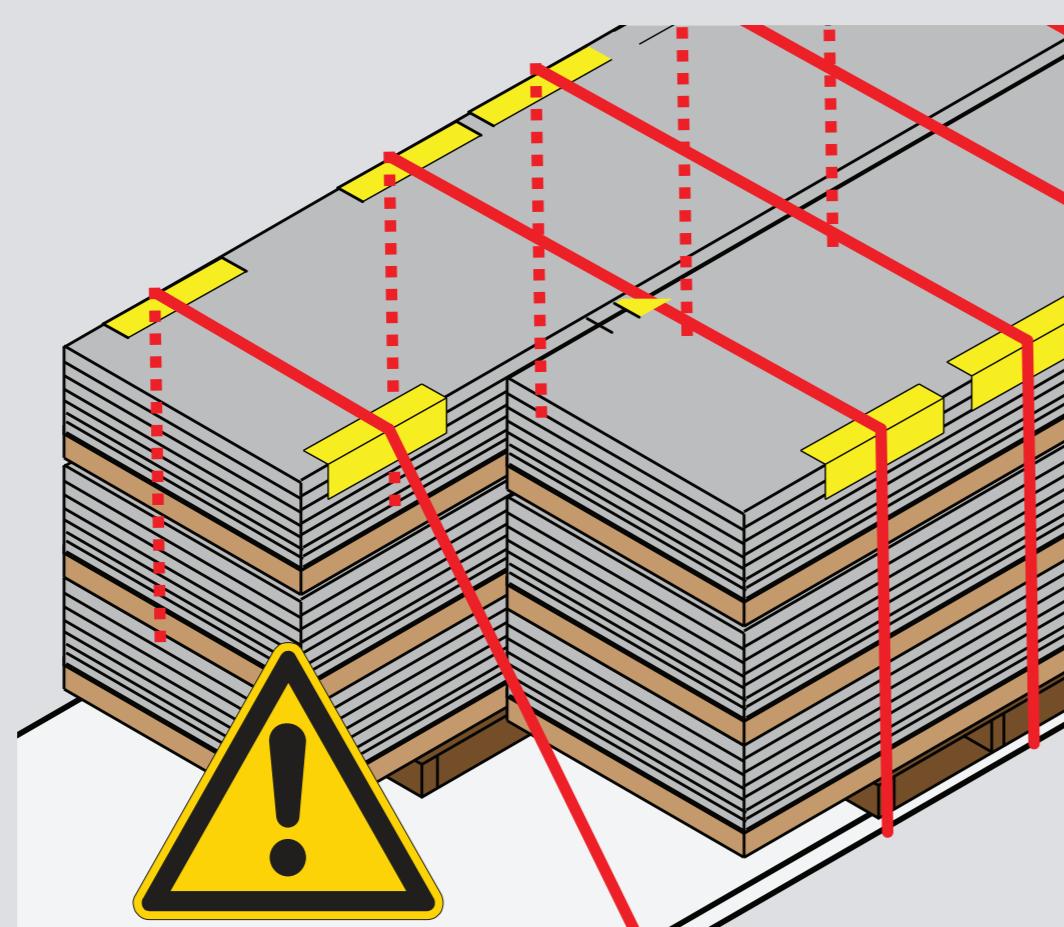


Lashings applied over part of the load do not count towards total lashing requirements in tables

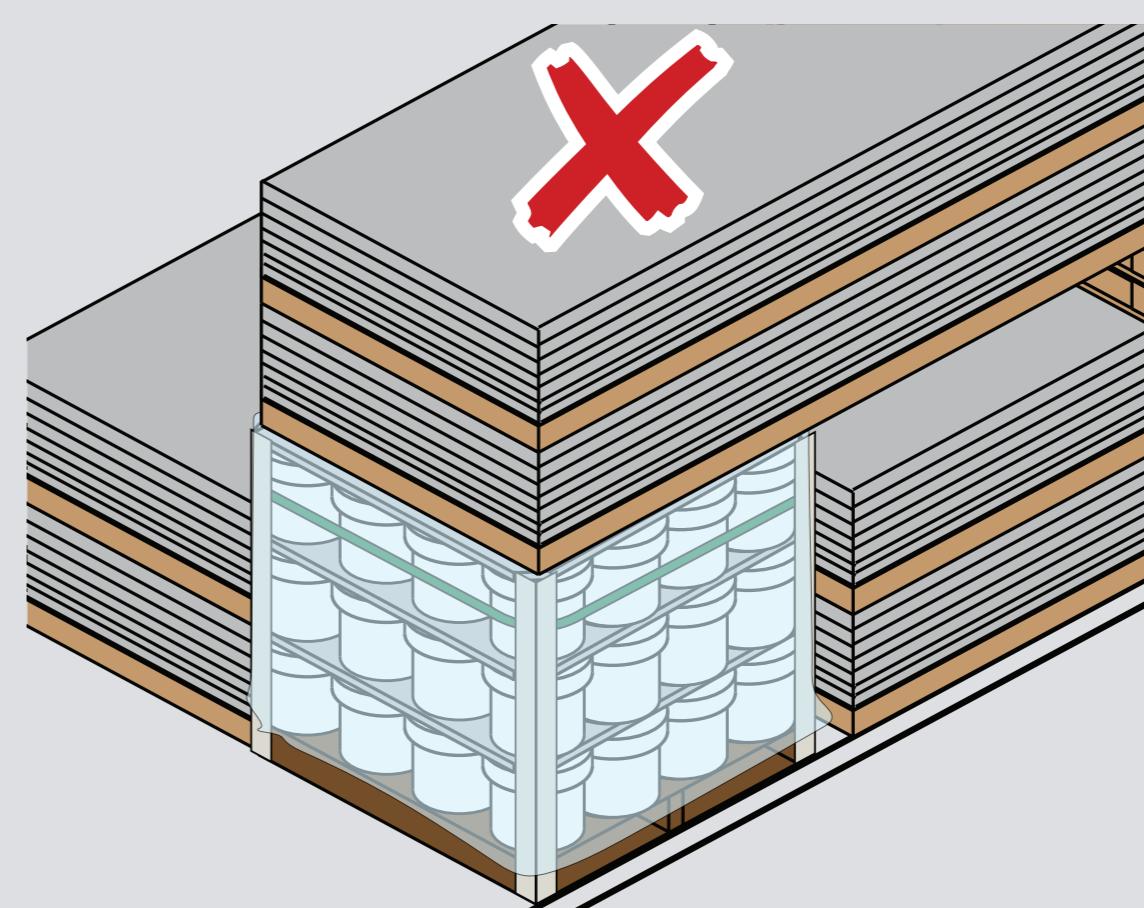

Do not stack sheet product on top of compound product

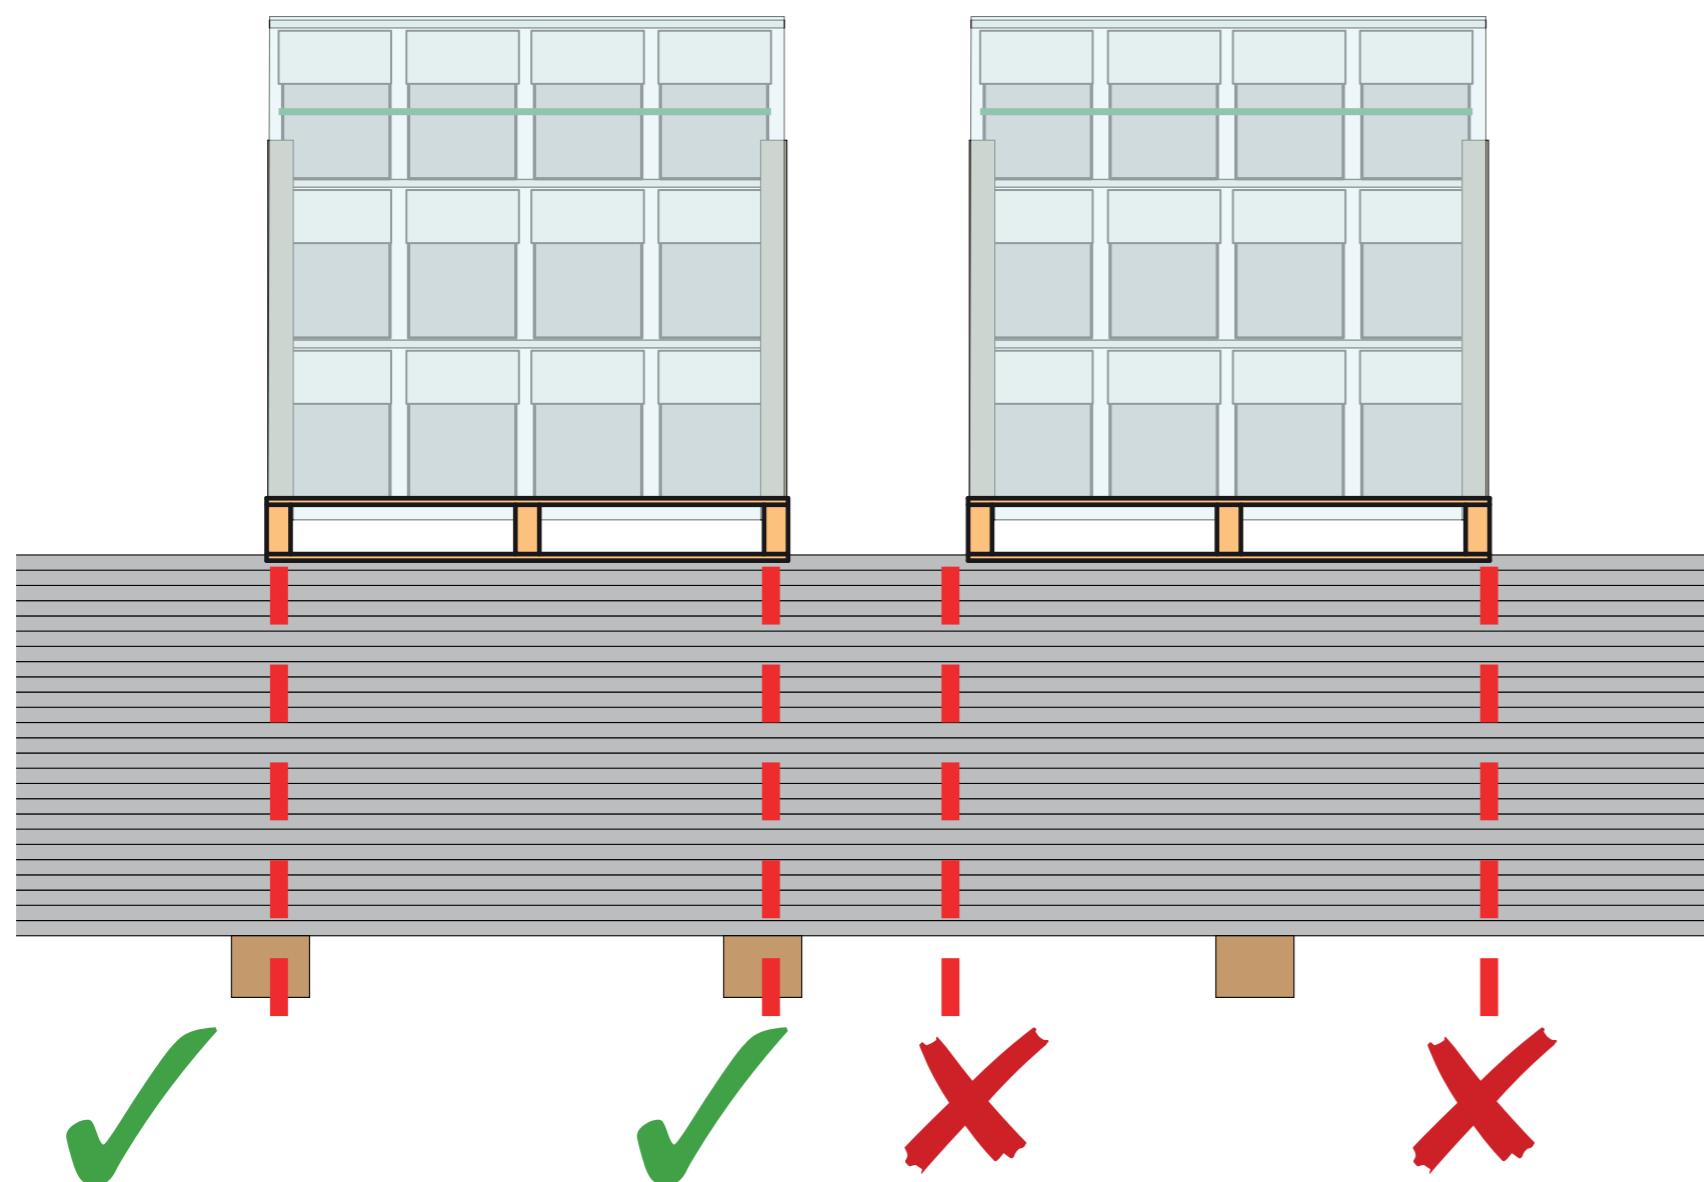

Pallets stacked on loose sheet product - bearers must align with the supporting dunnage

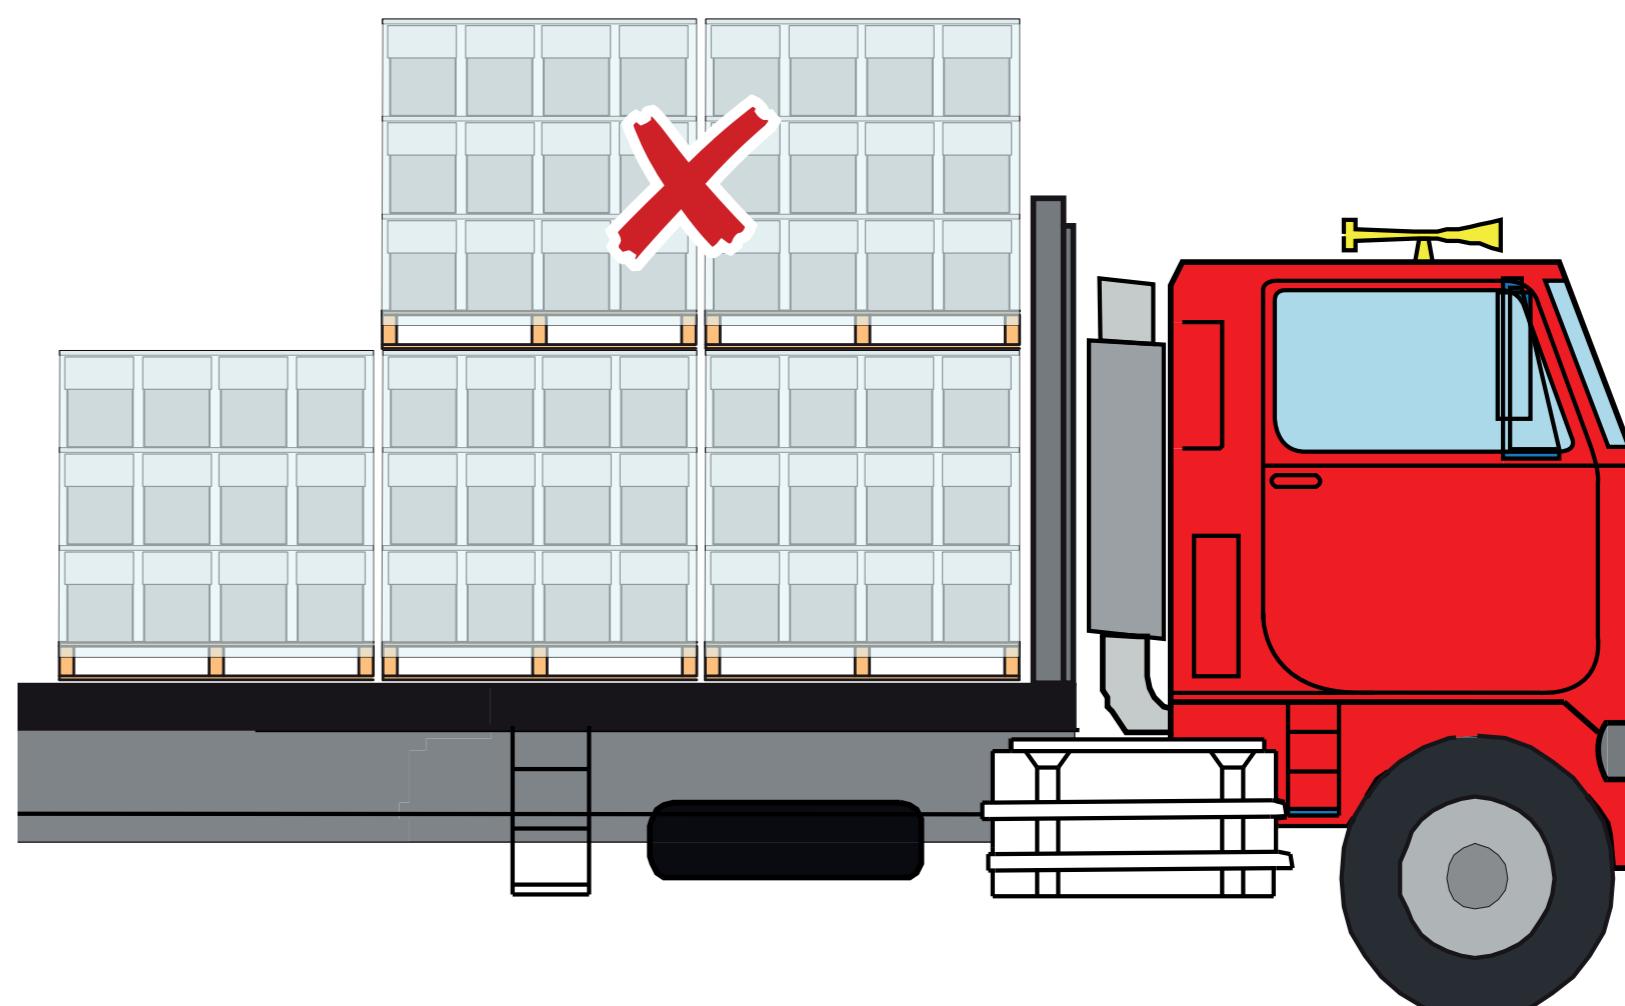

Do not exceed height of headboard
The maximum height of a vehicle including any load that is placed on it (measured from the ground) must not exceed 4.3 metres