

Angle for determining restraint lashings for steel packs


Steel packs should be blocked to Headboards loaded centrally and restrained with the tables on poster "Tie Down Lashing Requirements" using the angle shown.

Flat product should be secured separately also.




Do not stack cornice more than two packs high


Palletised sheets on top of cornice are ok

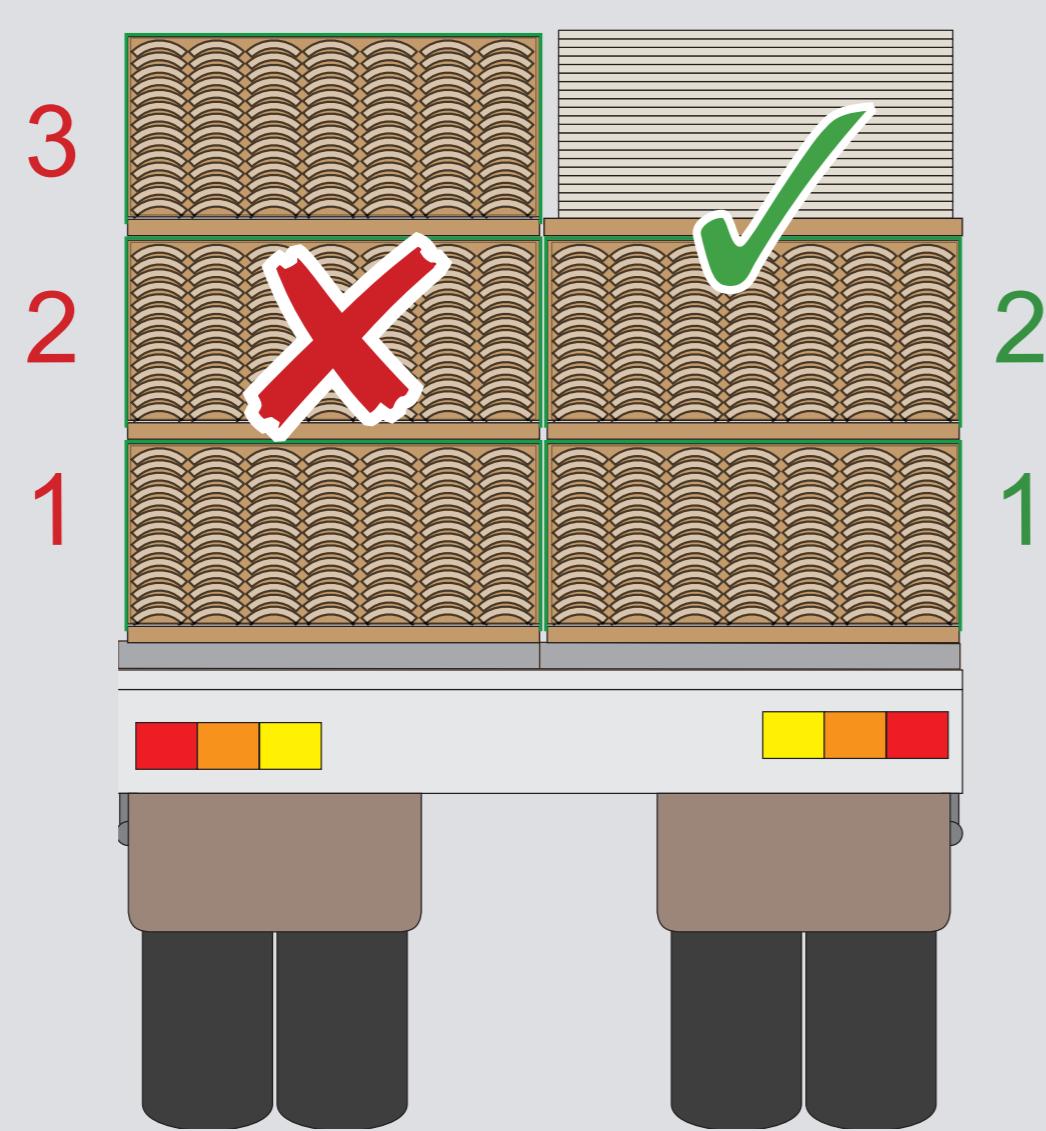

Stack cornice packs on top of sheet packs

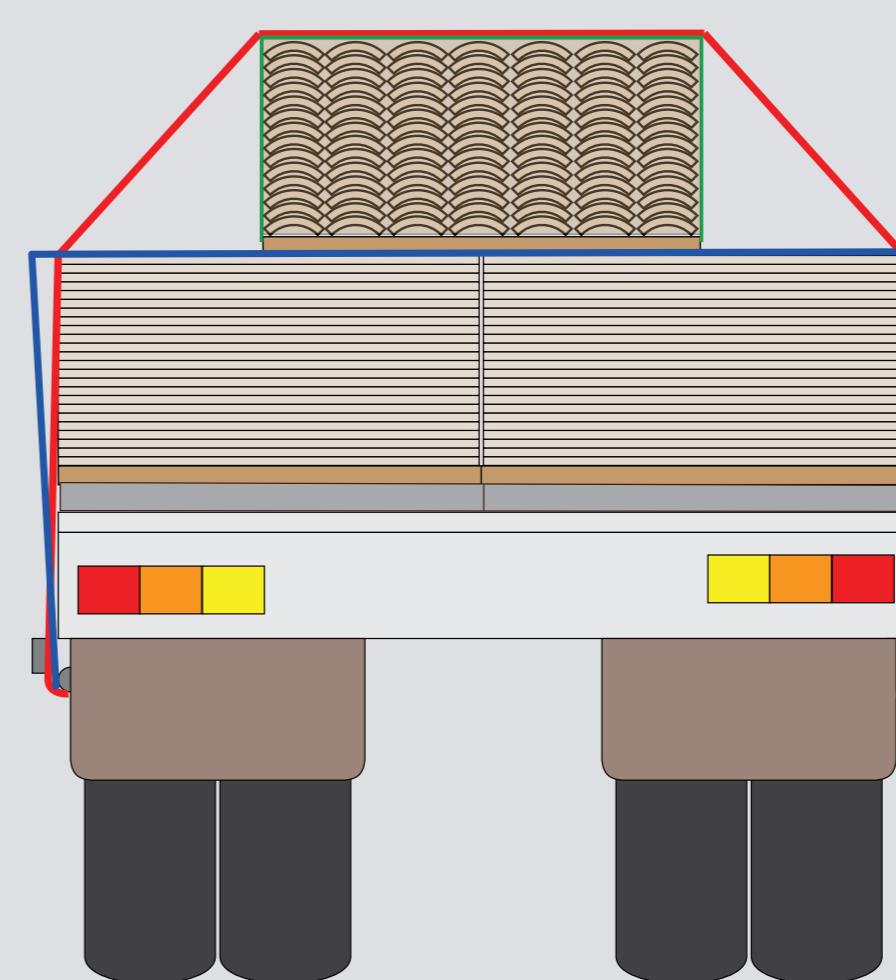

Do not stack loose sheet product on top of cornice product

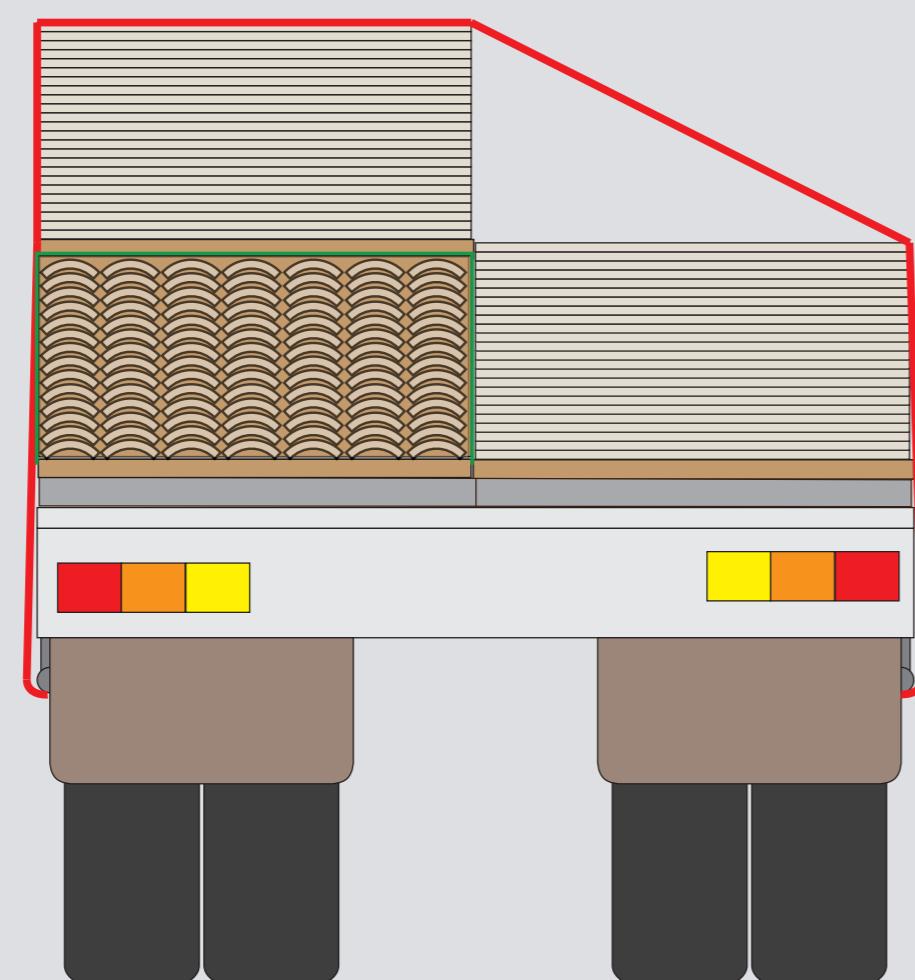

Maximum height difference across the truck is 300mm

No more than 300mm

